

# 5G/LTE WAN Extender IDG500-0GT01



## KEY FEATURES

- ✓ 1\* 5G/LTE (2\*SIM)
- ✓ 2 \* RJ-45 Giga LAN
- ✓ TB 5-32V in

## INTRODUCTION

IDG500-0GT01, a 5G/LTE WAN Extender, meets 3GPP Release 16 features. With compact, small and light weighted metal housing, it is also suitable for comprehensive network for various applications in Public / Local 5G Network.

### Product Summary:

1. Redundancy dual SIM offers connection reliability
2. Dual Image and self recovery function works when an abnormality is detected or unmanned

## APPLICATION

- Industrial PC, 4k ~ 8K high-definition surveillance camera digital signage, Commercial NAS/Printer, STB, IT equipment WAN connection
- Remote Operation
- Industrial PC
- RJ45 port for device connection

### High Speed Transmission



- 5G-NR
- Giga speed for upload and download

### Popular Features



- 2 x Giga RJ-45 Ports
- Cellular Router or Bridge

### Easy Installation



- Mounting Kit
- Power Range 5-32V


### Cellular Connection



- Detailed information via GUI or CLI
- Advanced Routing functions

## Remote Control

## Terminals and solutions

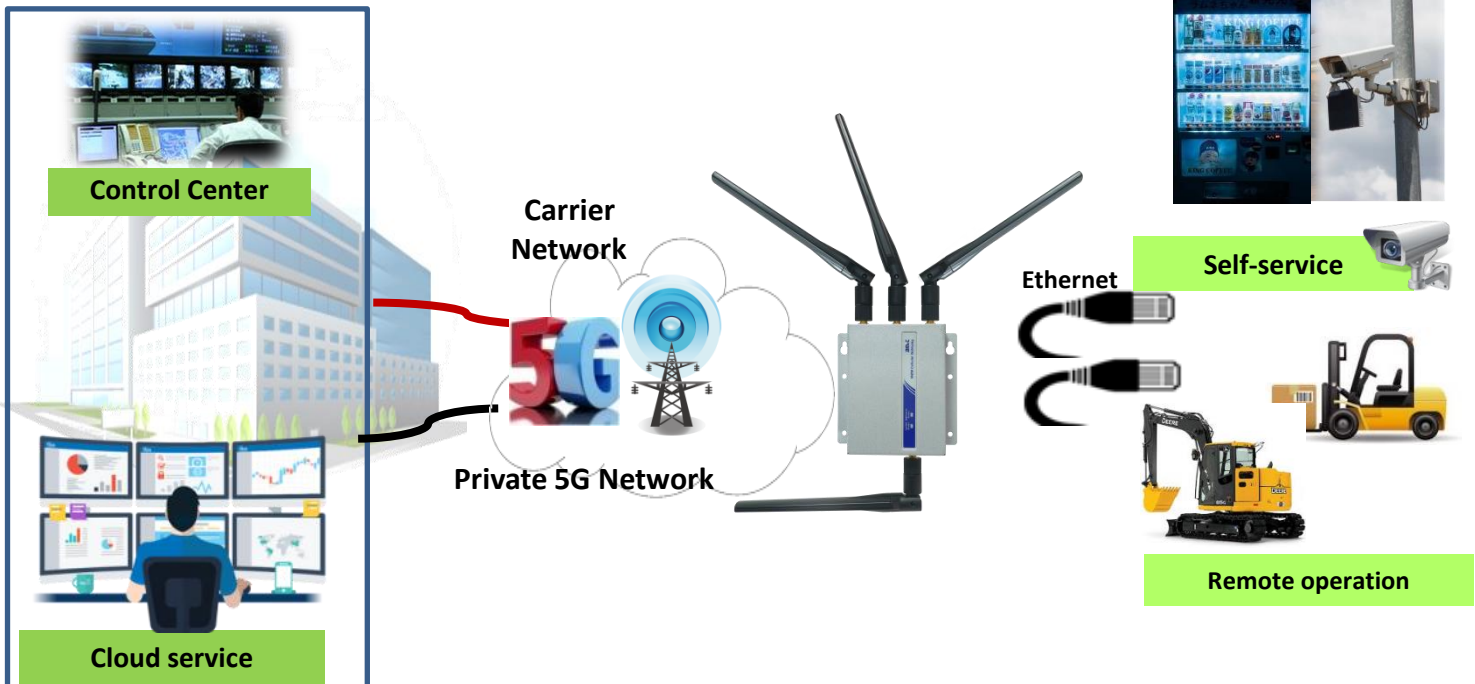

## SPECIFICATION

### Device Interface

- **Built in Cellular Module:** 1\*5G/LTE,2\* Nano SIM
- **Ethernet :** 2\*RJ45 GE
- **Power Input:** 1\* TB 5-32V DC 、 Power consumption: max. 7W
- **Antenna Con.:** 4\*SMA (F)-5G/LTE

### WAN & Uplink

- **WAN:** Cellular, Ethernet Connection, Failover
- **Cellular:** 5G/LTE,IPv4/6
- **Ether-WAN:** Dynamic IP, Static IP, PPPoE
- **Network Monitor:** ICMP/DNS Query

### Protocol

- **LAN & VLAN:** DHCP Server/Relay ,Port/Tag based VLAN
- **IPv6:** Dual Stack
- **Port Forward:** NAT 1-1, 1-many, DMZ, Virtual Server & Computer, VPN Pass-through
- **Routing:** Static, Dynamic - RIP1/RIP2

### Service

- **Cellular Toolkit:** Data Usage, SIM PIN, Network Scan
- **Scheduling:** System Reboot, Function On/Off
- **X.509 Certificated**

### Security

- **VPN Tunnel:** IPSec, OpenVPN, PPTP, L2TP, GRE
- **VPN Usage:** Site/Host, Client
- **Firewall:** Stealth Mode, IPS
- **Access Control:** Packet Filter, URL Blocking, MAC Filter

### Management

- **Configuration:** Web UI, CLI, Command Script
- **Management Tool:**SNMPv3 Std. & AMIT MIB 、TR-069
- **System:** Upgrade, Backup & Restore, Reboot & Reset, SysLog
- **Diagnostic:** Diagnostic Tools

### Status

- **Dashboard:** System Information
- **Network Status:** Connection information, Cellular Signal Quality
- **Cellular Mobile:** Signal Quality, IMEI/MEID, Usage Band
- **Security:** VPN Status, Firewall Rule list
- **Management:** SNMP&TR-069 Status, Network access and Login User, Cellular usage

### Environment

- **OP/Store Temp.:** -30°C ~ 60°C ; -40°C ~ 85°C
- **Humidity:** 10%~95% ( non-condensing )
- **Dimension:** 93x90x27mm

### Accessory

- 1\*Device, 4\*Cellular Ant,1\*RJ45 Cable
- 1\*Terminal block (2 pins for DC power supply)

### Others

- **Wall mount, DIN rail kits**

## ORDERING INFORMATION

Country	Band
EU,TW,Asia,US	<b>5G Sub-6G(SA or NSA):</b> n1/n2/n3/n5/n7/n8/n12/n13/n14/n20/n25/n26/n28/n29/n30/n38/n40/n41/n48/n66/n71/n75/n76/n77/n78/n79
	<b>4 x 4 MIMO:</b> n1/n2/n3/n7/n25/n30/n66/n38/n40/n41/n48/n77/n78/n79
	<b>UL 2 x 2 MIMO (SA only):</b> n38/n40/n41/n48/n77/n78/n79
	<b>FDD-LTE Bands:</b> B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/B19/B20/B25/B26/B28/B29/B30/B32/B66/B71
	<b>TDD-LTE Bands:</b> B34/B38/B39/B40/B41/B42/B43/B48
	<b>DL 4 x 4 MIMO:</b> B1/B2/B3/B4/B7/B25/B30/B38/B40/B41/B42/B43/B48/B66
Regulatory	CE/ FCC/ JATE/ TELEC
Carrier	

Comment

Specifications are subject to change without prior notice..

## MECHANIC DRAWING

Front View



Back View



### AMIT Wireless Inc.

TEL: +886 (0)6 505 8026 FAX: +886 (0)6 505 8068

Web: <https://www.amit.com.tw> Email: [sales@amit.com.tw](mailto:sales@amit.com.tw)

No. 28, Lane 31, Huandong Rd., Sec. 1, Xinshi Dist., Tainan City 74146, Taiwan (R.O.C.)