

# Magnetantenne 4G LTE/3G/2G

## CELLULAR / LTE Magnetic Mount

### Key Features

#### CELLULAR / LTE

- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 MHz

Magnetic Mount

High Performance

Ground Plane Dependent

Customizable Cable and Connector

Dimensions Ø 31 x 72 mm



## 1. Antenna and electrical specifications

Parameters	CELLULAR / LTE Antenna		
<b>Standards</b>	2G,3G and 4G		
<b>Band (MHz)</b>	700/850/900	1700/1800/1900/2100	2600
<b>Frequency (MHz)</b>	698-960	1710-2170	2500-2700
<b>Return Loss (dB)</b>	~-13.4	~-14.1	~-18.1
<b>VSWR</b>	~1.9:1	~1.5:1	~1.3:1
<b>Efficiency (%)</b>	~47	~39	~36
<b>Peak Gain (dBi)</b>	~1.0	~2.4	~2.1
<b>Average Gain (dB)</b>	~-3.3	~-4.1	~-4.5
<b>Impedance (Ohm)</b>	50		
<b>Polarisation</b>	Linear		
<b>Radiation Pattern</b>	Omni-Directional		
<b>Max. Input Power (W)</b>	35		
<b>Connector Type</b>	SMA-Male Standard (Other Connectors Available)		
<b>Cable Length</b>	300 cm Standard (Any Cable Length Available)		
<b>Cable Type</b>	LMR100 Standard (Other Cables Available)		

### Antenna Measurement Conditions:

Mounted on 30 x 30 cm Metal Plate



200 cm of Cable LMR100



Measured in Certified CTIA 3D Anechoic Chamber



## 2. Mechanical and environmental specifications

Specifications	Magnetantenne 4G LTE/3G/2G
<b>Mounting Type</b>	Magnetic Mount
<b>Dimensions (mm)</b>	Ø 31 × 72
<b>Radome color</b>	Black
<b>Antenna Base</b>	PP
<b>Whip Material</b>	Brass
<b>Operating Temperature (C)</b>	-40 to +85
<b>Storage Temperature (C)</b>	-40 to +85
<b>Substance Compliance</b>	RoHS


### 3. Antenna parameters

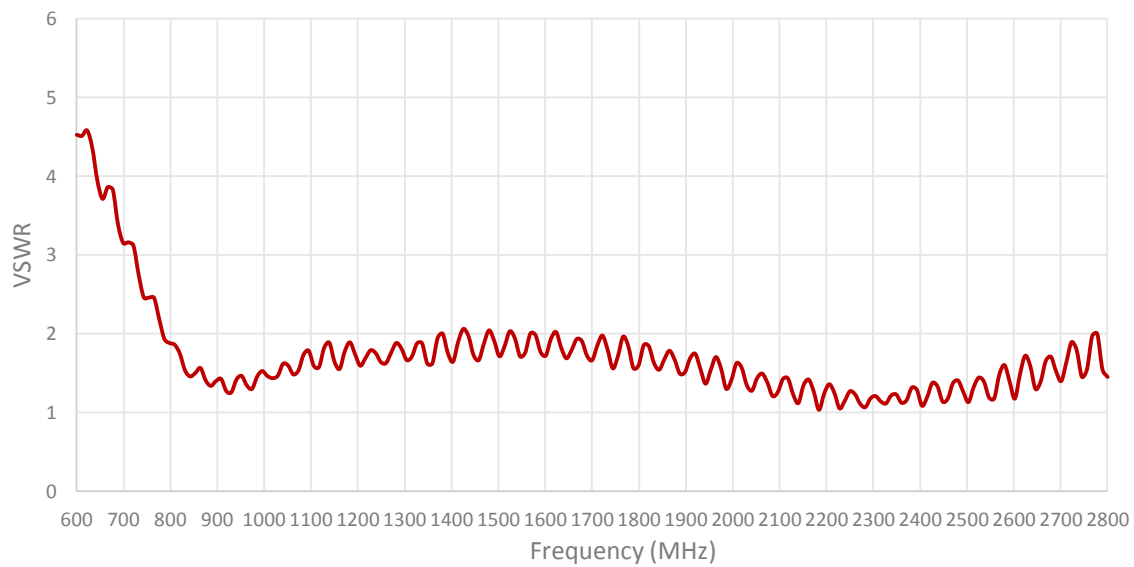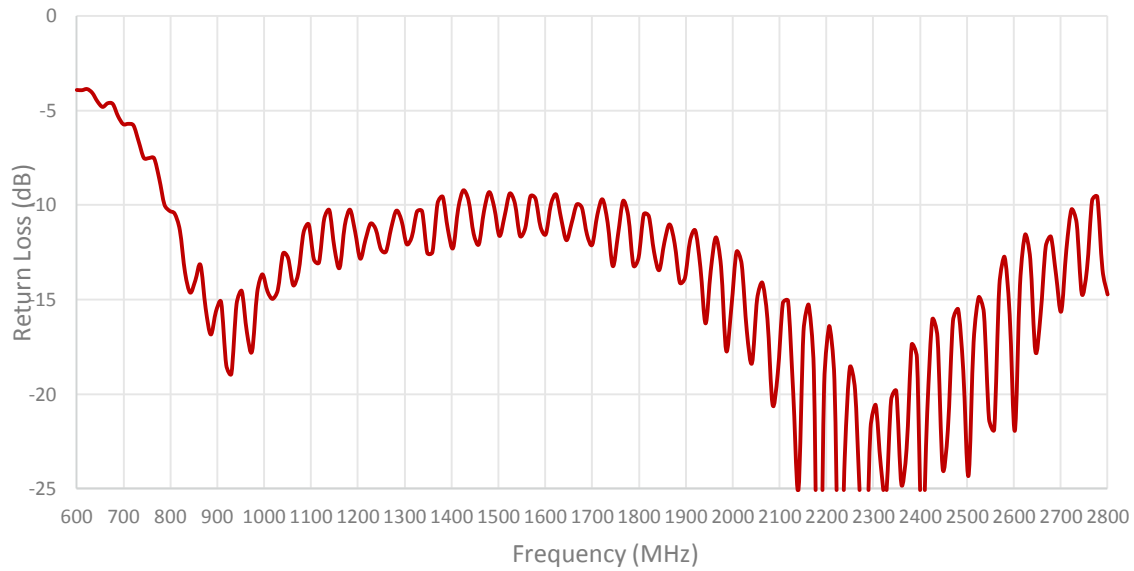

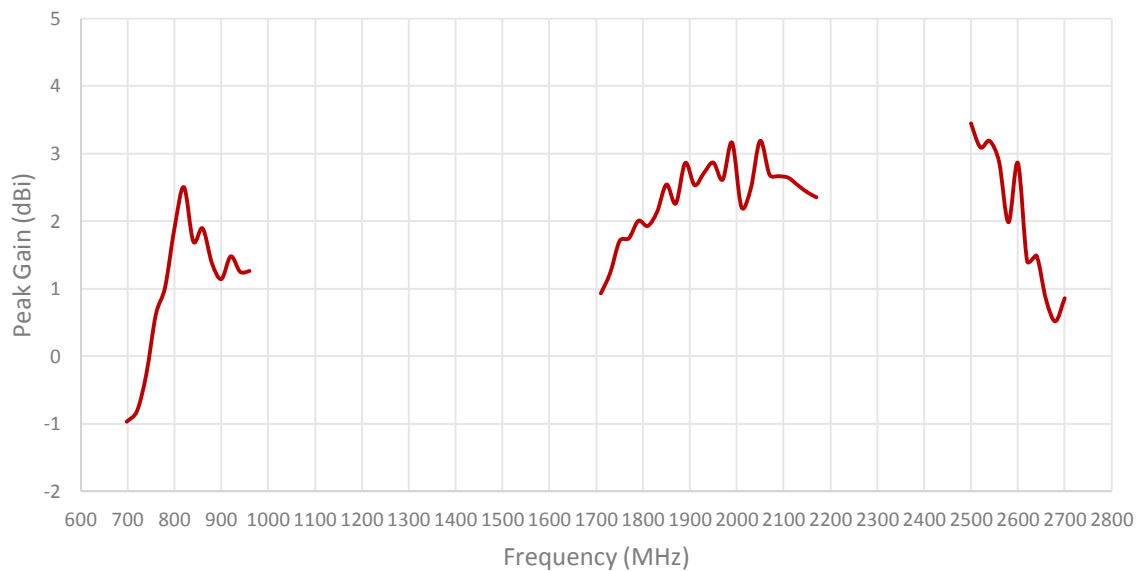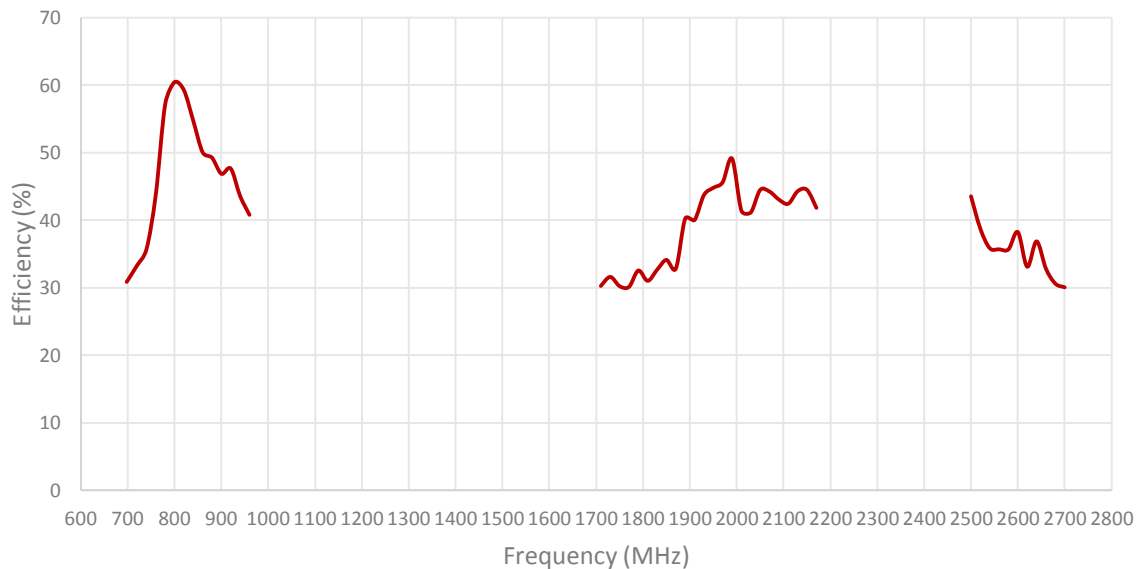


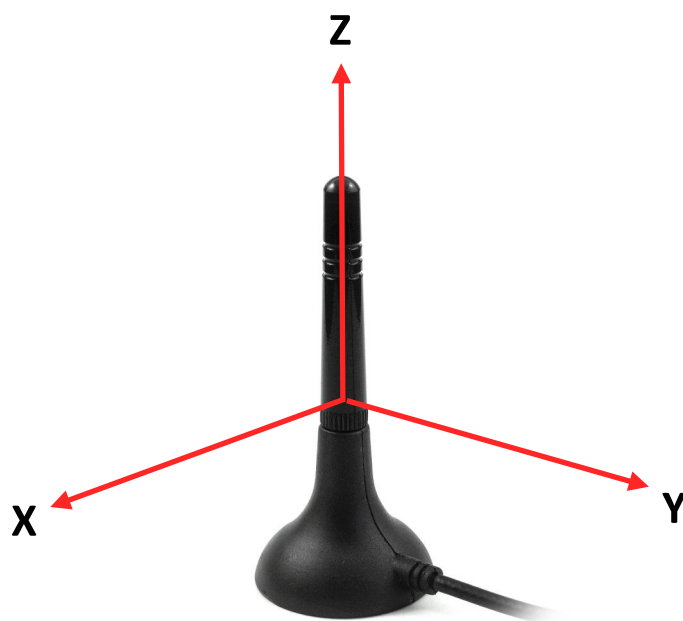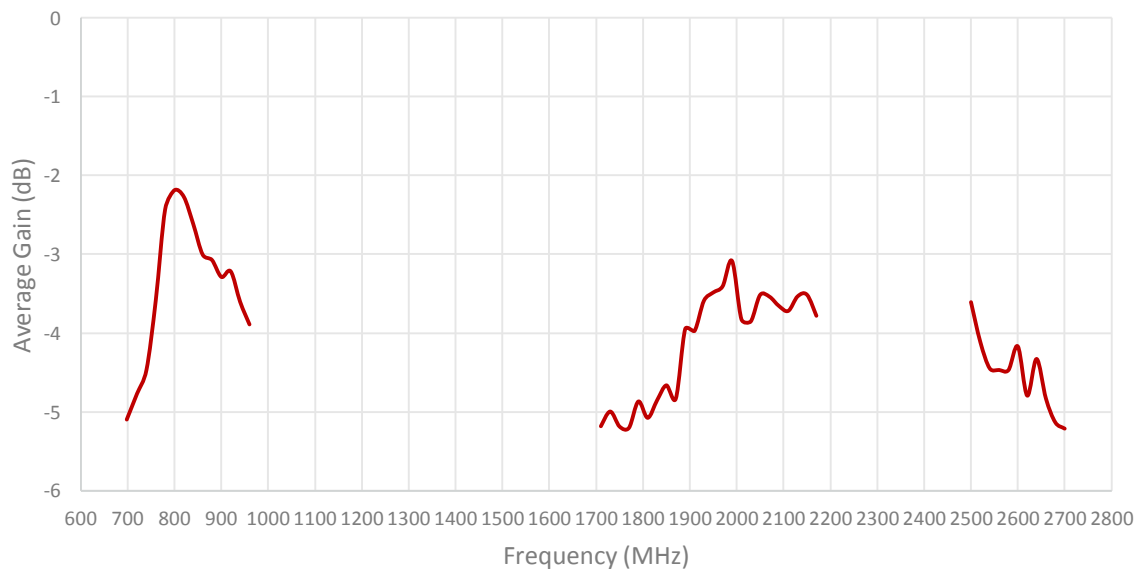

Radiation pattern reference

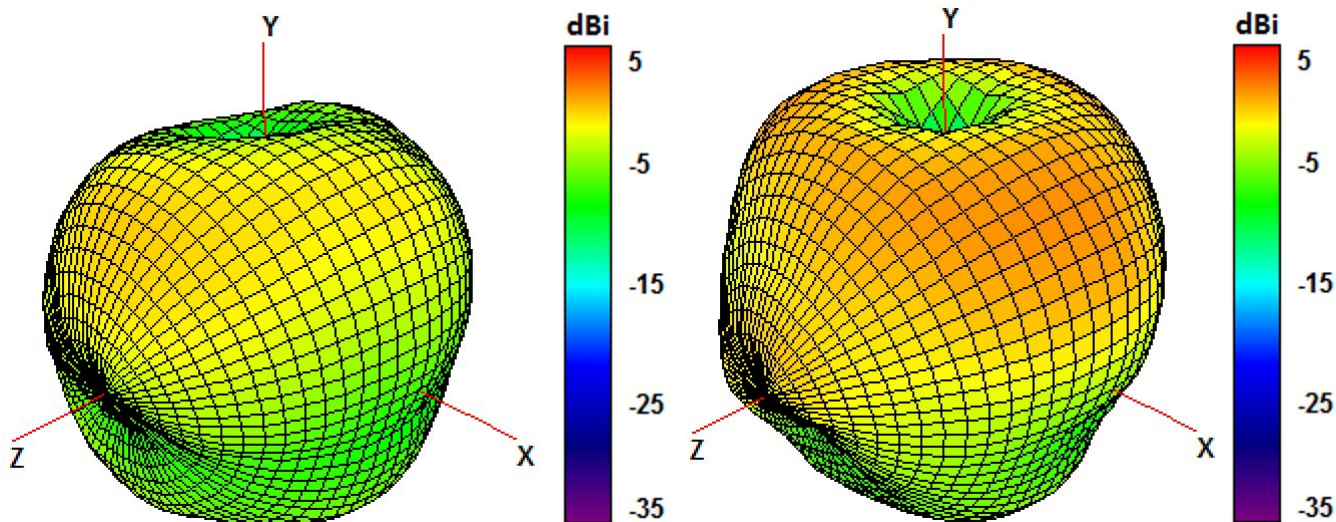


750 and 850 MHz Radiation pattern

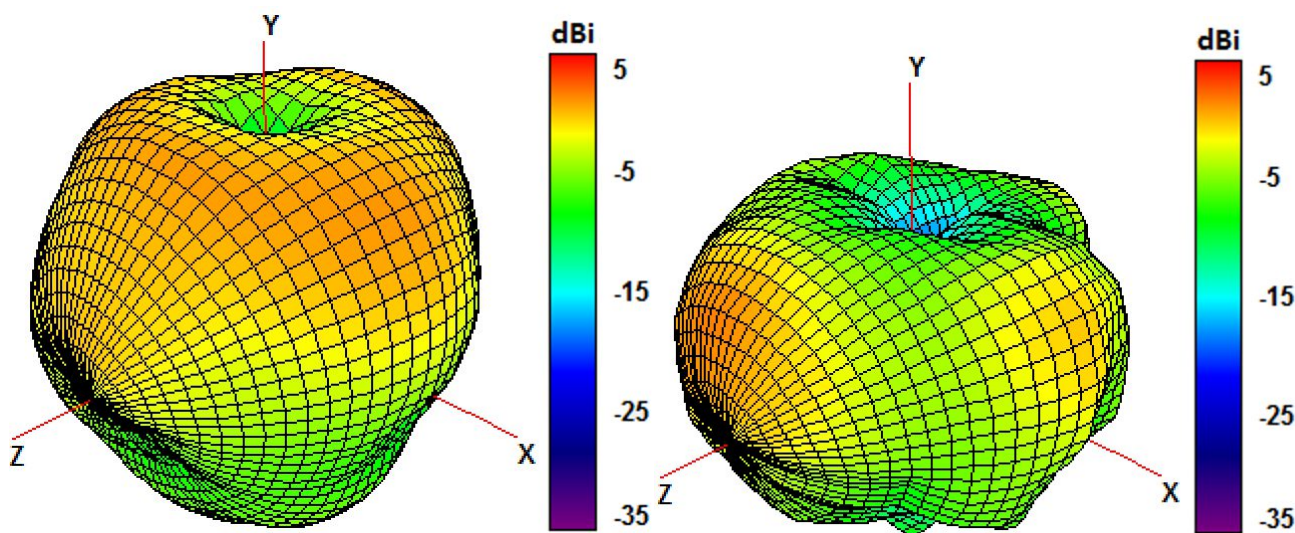


940 and 1750 MHz Radiation pattern



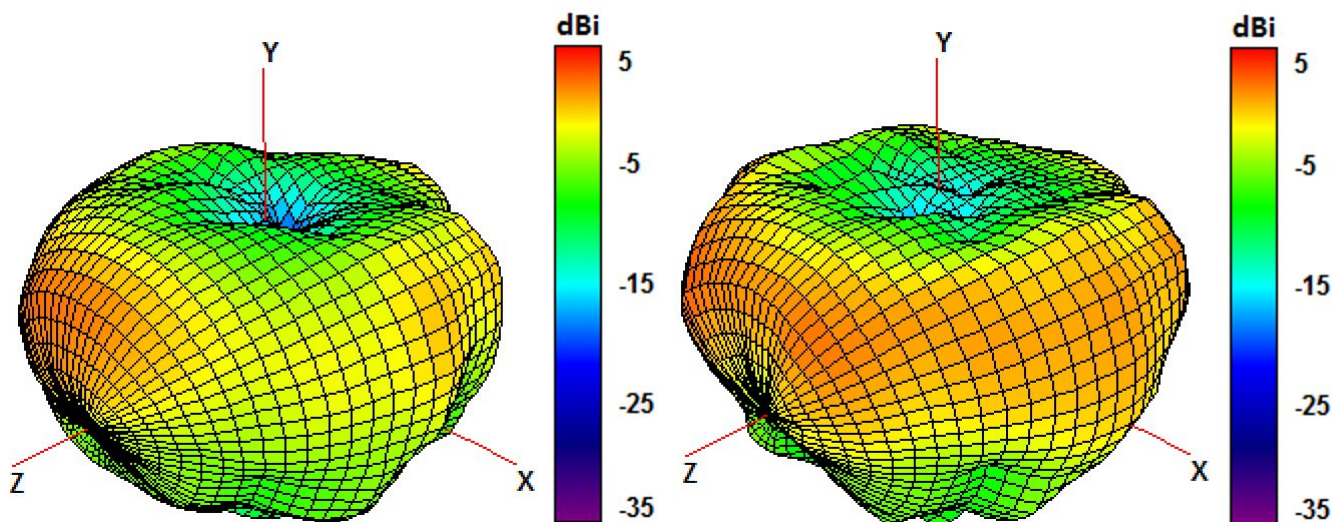


1850 and 1950 MHz Radiation pattern

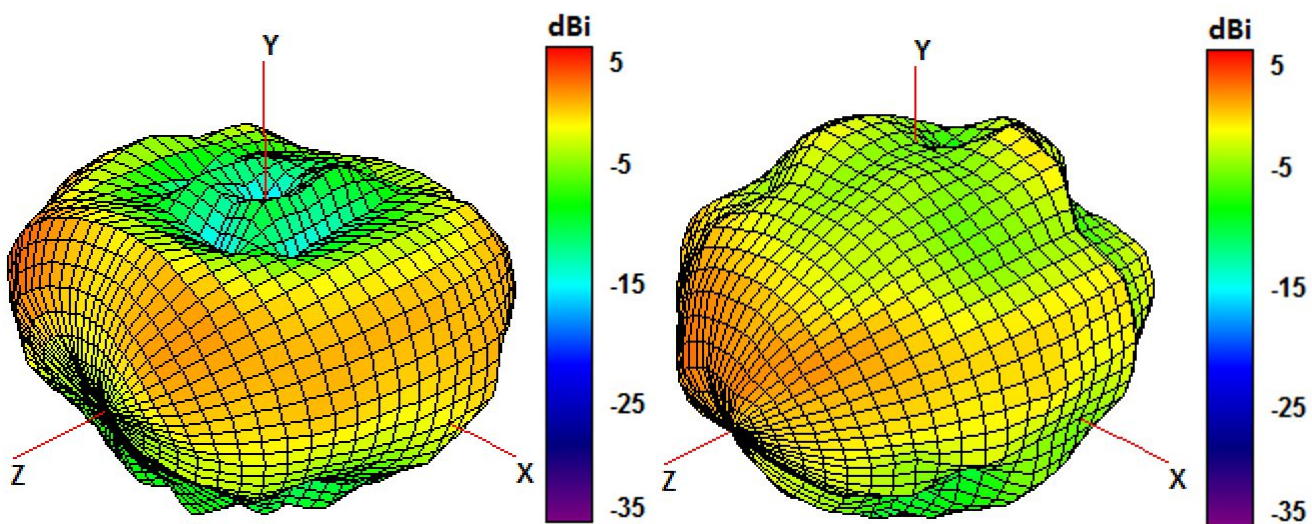

2100 and 2600 MHz Radiation pattern

## 4. Antenna drawings

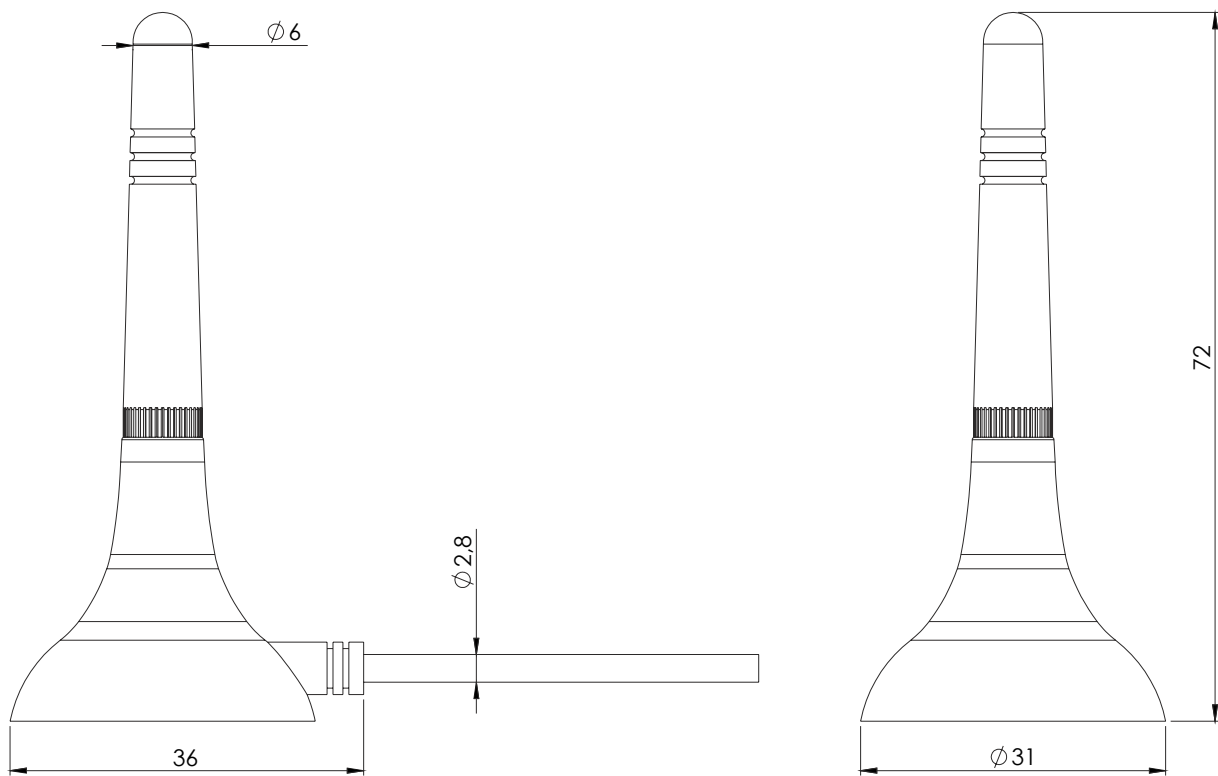



## 5. Antenna Images

