

LTE-GNSS Kombiantenne



Type	Multiband antenna
Frequencies	4G/LTE (699-960/1710-2690 MHz), AMPS (850 MHz), GSM (900 MHz), DCS (1800 MHz), PCS (1900 MHz), 3G (UMTS 2.1 GHz), WIFI / BLUETOOTH (2.4 GHz), GPS (1575.42 MHz), GALILEO L1 (1575.42 MHz), GLONASS (1592 - 1610 MHz)
Operating temperature	-40°C – 85°C
Mounting	Body Mount
IP Rating	IP67, IK09, IP69K

LTE (Cable 1)

Frequencies	4G/LTE (699-960/1710-2690 MHz) AMPS (850 MHz) GSM (900 MHz) DCS (1800 MHz) PCS (1900 MHz) 3G (UMTS 2.1 GHz) WIFI / BLUETOOTH (2.4 GHz)
Impedance	50 Ohms
Polarization	Linear
Gain	2dBi Max.
VSWR	<3.3:1
Power handling	25W

Navigation (Cable 2)

Frequencies	GPS (1575.42 MHz) GALILEO L1 (1575.42 MHz) GLONASS (1592 - 1610 MHz)
Impedance	50 Ohms
Noise figure	1.2dB
Patch gain	2-3 dBiC
Patch size	24 x 24 x 4 mm
Polarization	RHCP
LNA Gain	23dB at 3V / 24dB at 5V
VSWR	<1.5:1
Voltage supply	2.7V - 5.5V
Current	15mA - 25mA
Power (max.)	138mW
GPS Isolation	25dB min.


For different cable length and connector type ask our sales team.

Mechanical Specifications and Dimensions


Material: Lid: ASA / Base: Zamak / Gasket: TPE

Max. Dimensions: 77,3 x 66,5mm

Colour: Black (for different colours please ask our sales team)

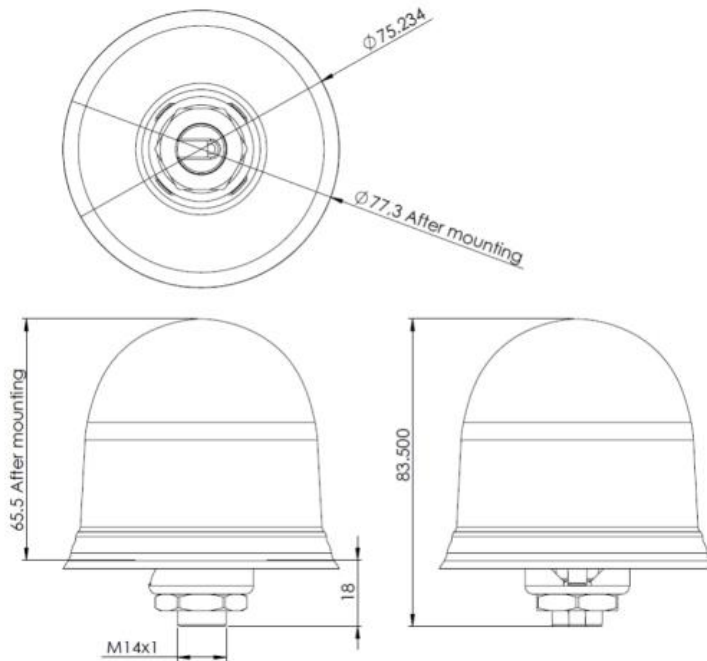

Mounting holes

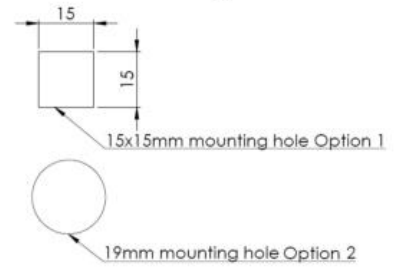

Basic shape of base



Screw M14x1



Measurements

- Measured on Ground plane 60x60cm with 100cm cable RG174



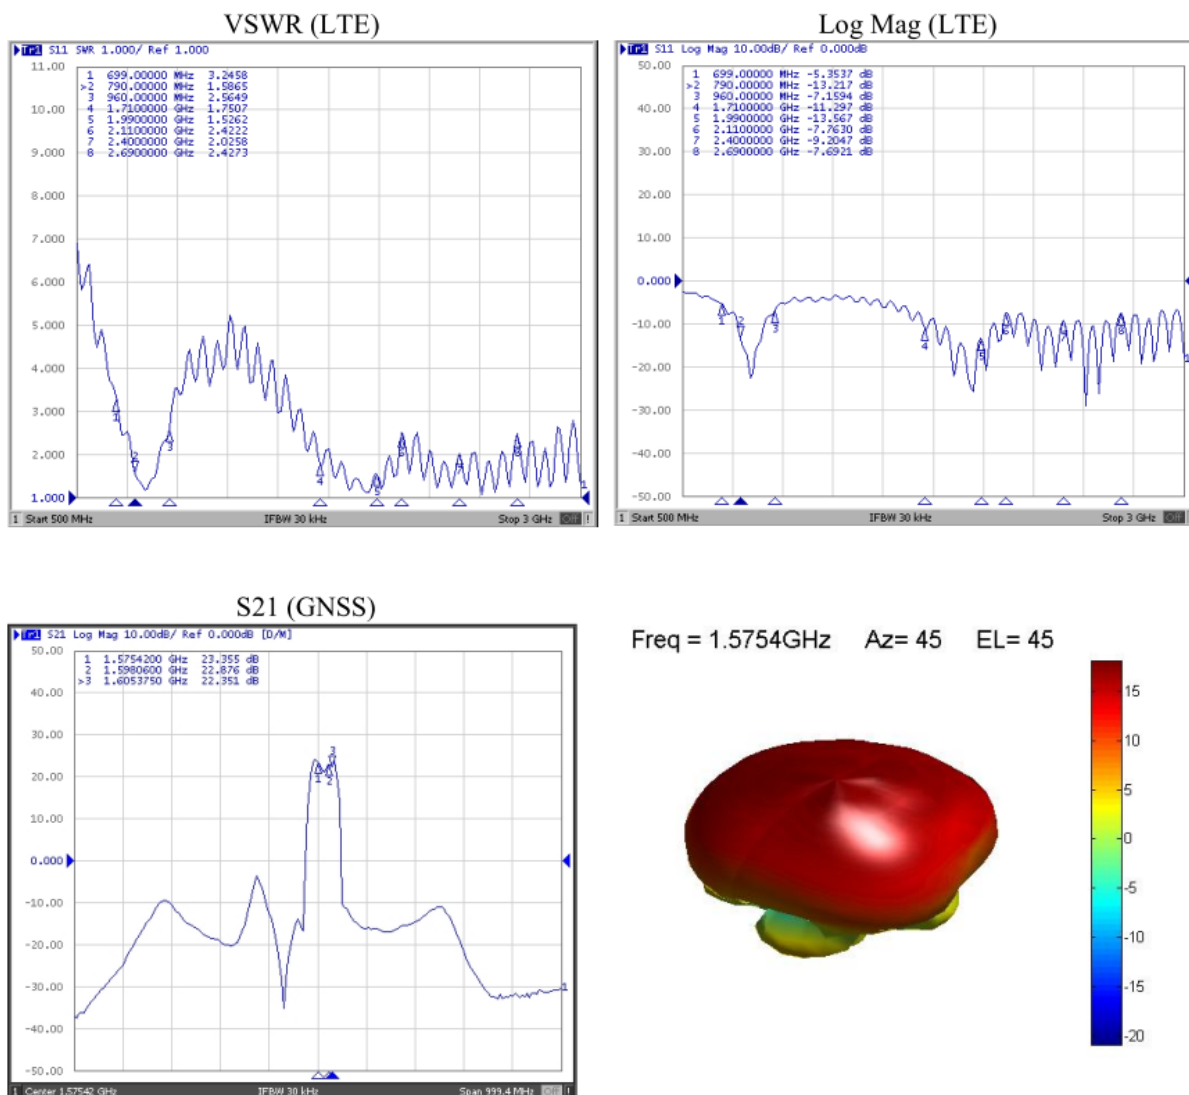


Figure 1 – GNSS gain at 3V



Figure 2 - GNSS 3D radiation pattern

3D Radiation Pattern



Freq = 0.798GHz Az= 45 EL= 45



Freq = 0.8530GHz Az= 45 EL= 45




Freq = 0.897GHz Az= 45 EL= 45





Freq = 1.799GHz Az= 45 EL= 45





Freq = 1.909GHz Az= 45 EL= 45



Freq = 2.107GHz Az= 45 EL= 45



Freq = 2.404GHz Az= 45 EL= 45



Freq = 2.602GHz Az= 45 EL= 45

