

Product Datasheet

Cellular, GNSS and 2.4 GHz ISM Screw Mount

Key Features

Cable 1: Cellular

- 824-960 MHz
- 1710-2170 MHz

Cable 2: 2.4 GHz ISM

- 2410-2490 MHz

Cable 3: GPS/GLONASS/QZSS/Galileo

- 1575-1610 MHz

Screw Mount

Anti-Rotation Mechanism

Ground Plane Dependent

Customizable Cable and Connector

Dimensions \varnothing 146 x 31.5 mm

Certificates: IK09, IP67, IP69K



1. Antenna and electrical specifications

Cable 1

Parameters	Cellular Antenna	
Standards	2G and 3G	
Band (MHz)	850/900	1700/1800/1900/2100
Frequency (MHz)	824-960	1710-2170
Return Loss (dB)	~-9.3	~-12.5
VSWR	~2.1:1	~1.7:1
Efficiency (%)	~43	~37
Peak Gain (dBi)	~1.8	~2.3
Average Gain (dB)	~-3.7	~-4.3
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	LMR100 Standard (Other Cables Available)	

Cable 2

Parameters	2.4 GHz ISM Antenna	
Standards	WiFi, BT, ZigBee, ISM	
Band (MHz)	2.4 GHz	
Frequency (MHz)	2410-2490	
Return Loss (dB)	~-15.5	
VSWR	~1.4:1	
Efficiency (%)	~38	
Peak Gain (dBi)	~2.5	
Average Gain (dB)	~-4.1	
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	10	
Connector Type	RP-SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	


Cable Type	LMR100 Standard (Other Cables Available)	
Antenna Measurement Conditions:	<p>Mounted on 30 x 30 cm Metal Plate 200 cm of LMR100 Cable Measured in Certified CTIA 3D Anechoic Chamber</p>	
Cable 3		
Parameters	GNSS Ceramic Active Antenna	
Standards	GPS/QZSS/Galileo	GLONASS
Band (MHz)	1575	1602
Frequency (Mhz)	1575.42	1598-1606
Patch Size (mm)	25 x 25 x 4	
Passive Gain (dBi)	~3.6	
Impedance (Ohms)	50	
Radiation Pattern	Hemispherical	
Voltage Range (V)	1.5 – 3.6	
Active Gain (dB)	28 @ 2.7 V	
Noise Figure (dB)	1.8 @ 2.7 V	
Current Consumption (mA)	9 @ 2.7 V	
Power Consumption (mW)	24.3 @ 2.7V	
Saw Filter Type	Pre-Filter	
Out of Band Rejection (dBc)	~43	
ESD Protection (kV)	6	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	LMR100 Standard (Other Cables Available)	

2. Mechanical and environmental specifications


Mounting Type	Screw Mount
Dimensions (mm)	Ø 146 x 31.5
Radome	ABS
Radome color	Black
Antenna Base	Zamak
Gasket	TPE

Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IK09, IP67, IP69K

Table 1: Cellular

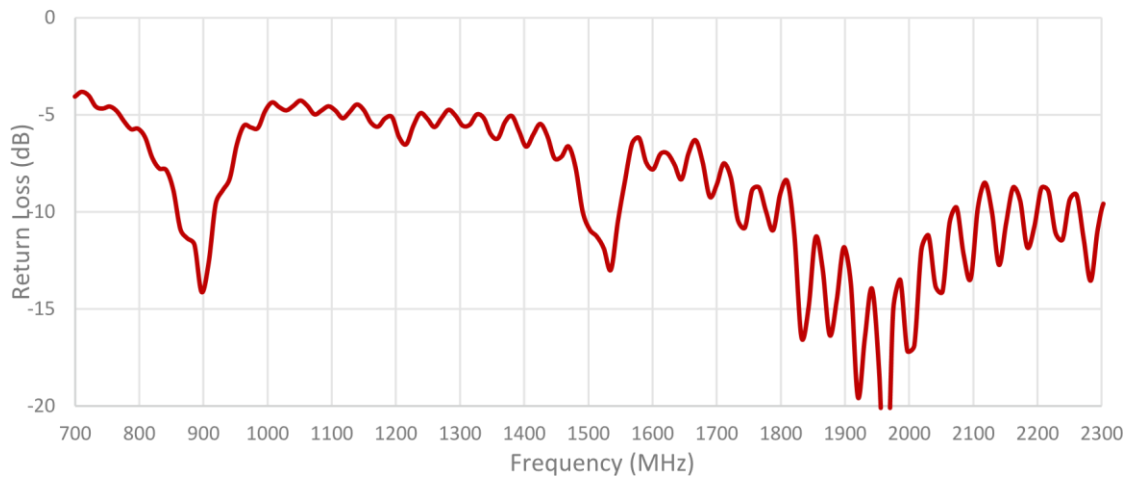


3. Antenna parameters

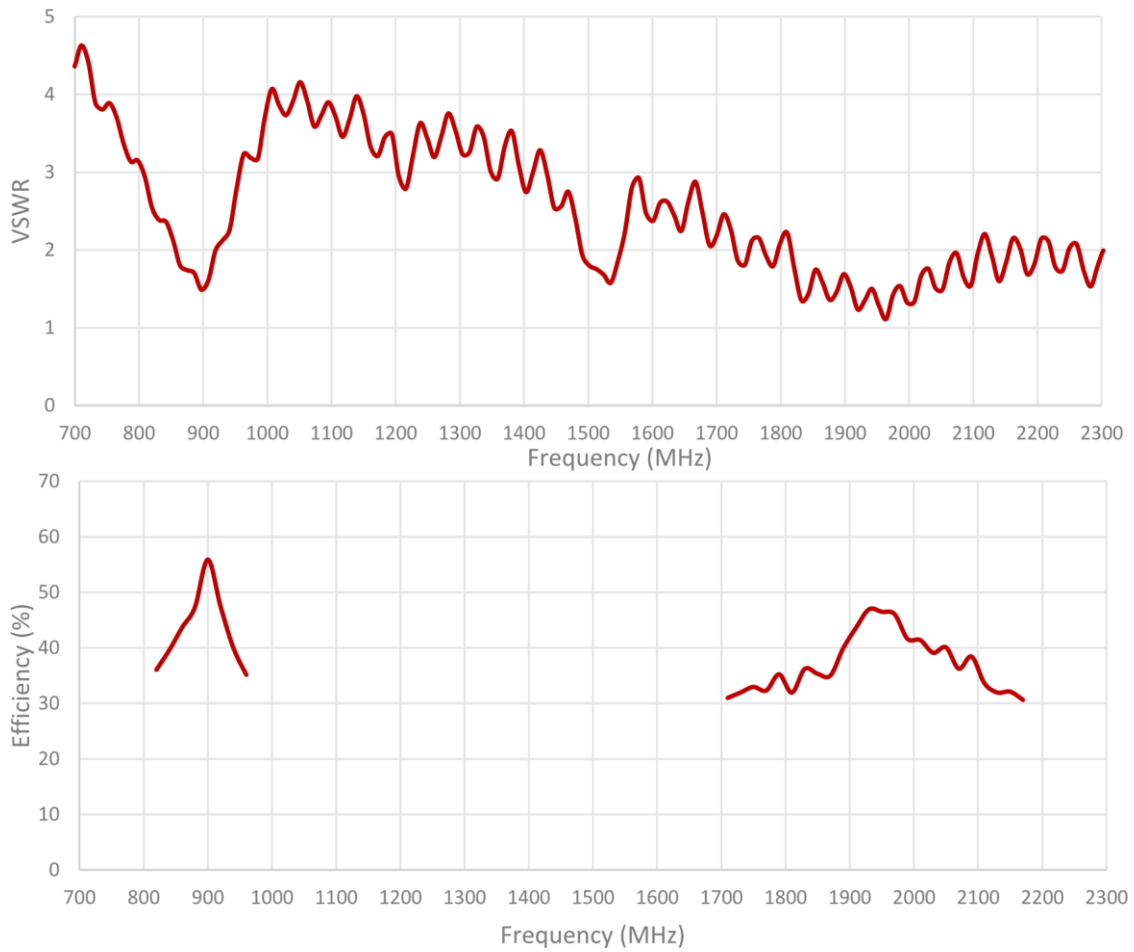



Cable 2: 2.4 GHz ISM

we make
your business
wireless

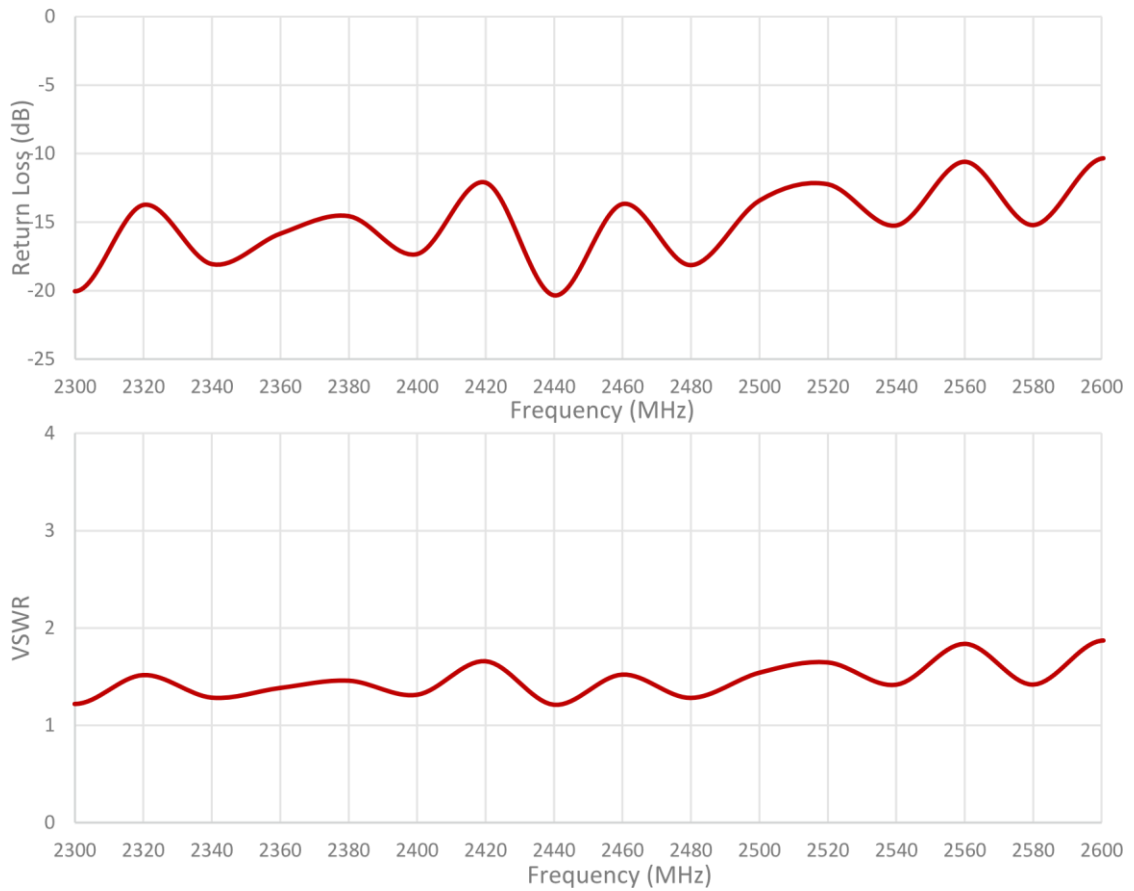



m2m Germany GmbH
Am Kappengraben 18
61273 Wehrheim
Steuer-Nr.: 0323998193
USt-IdNr.: DE255404069

Tel.: +49(6081)587386-0
Fax: +49(6081)587386-9
info@m2mgermany.de
www.m2mgermany.de

Geschäftsführer: Ralf Schoula
Marius Nicolaj
Registergericht: HRB 10714 Bad Homburg
WEEE-Reg.-Nr.: DE 25816129

Bank: Commerzbank AG
EURO: IBAN: DE63 5004 0000 0344 9121 00
BIC: COBADEFFXXX
USD: IBAN: DE36 5004 0000 0344 9121 01
BIC: COBADEFFXXX

Bank: Nassauische Sparkasse (Usingen)
EURO: IBAN: DE26 5105 0015 0304 2174 09
SWIFT / BIC-CODE: NASS DE 55 XXX

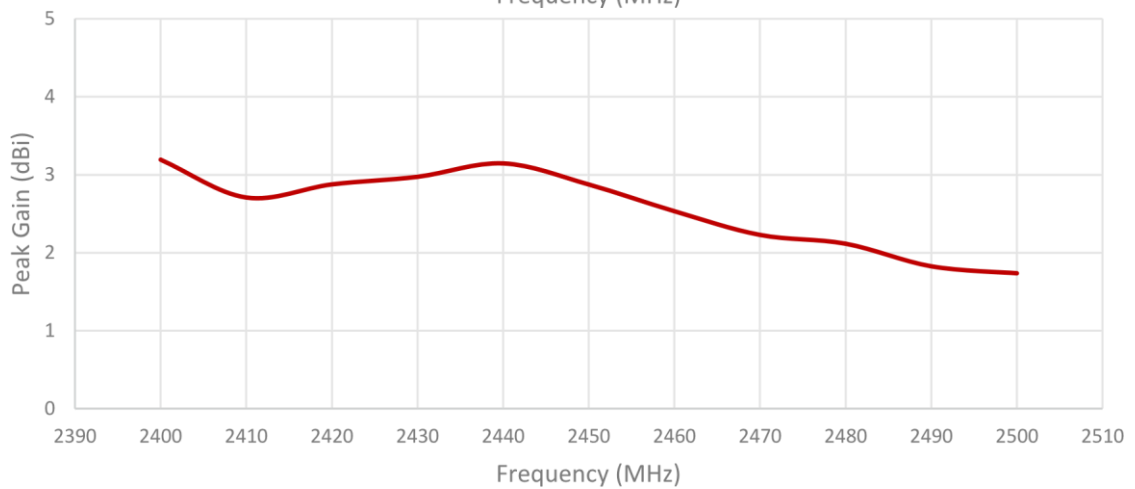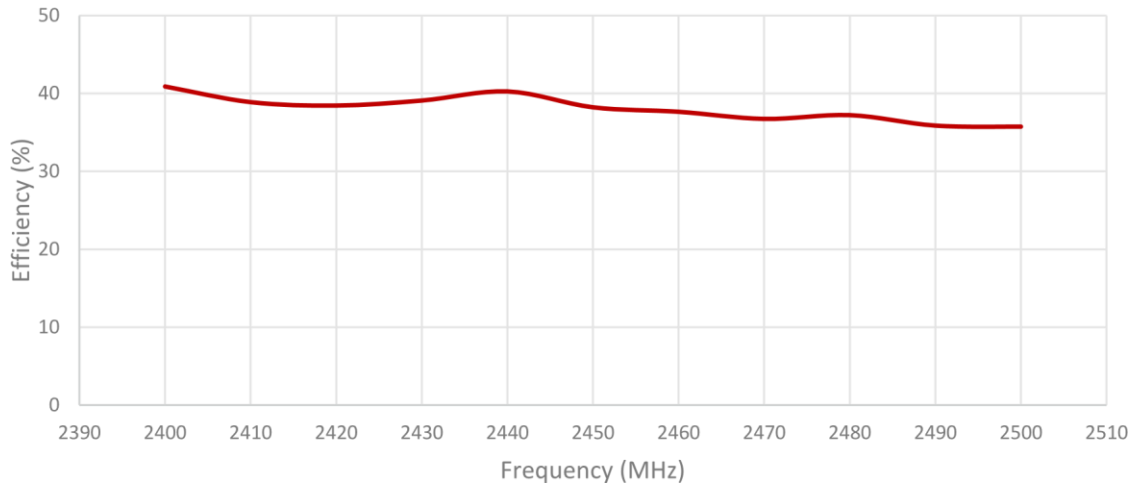




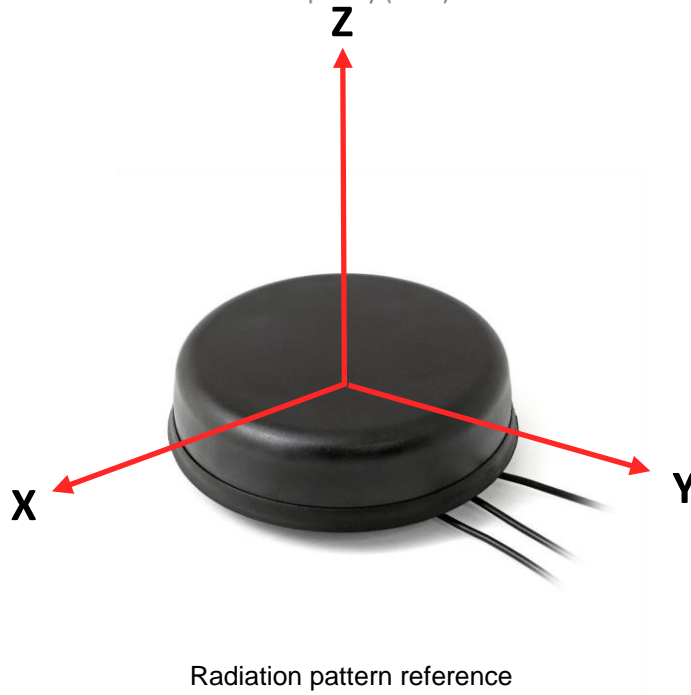



Table 1: Cellular

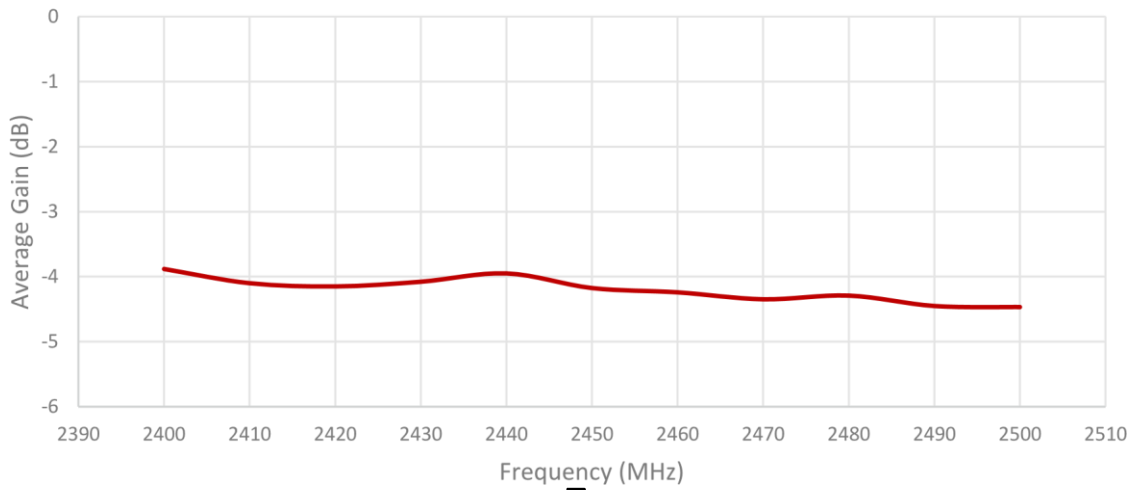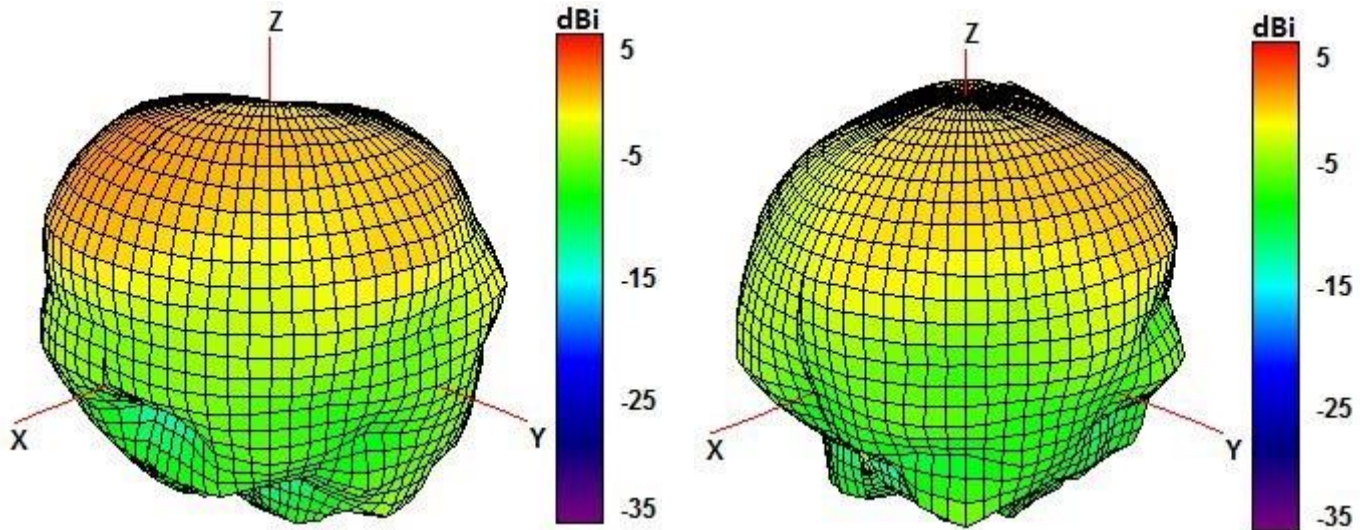

850 and 940 MHz Radiation pattern

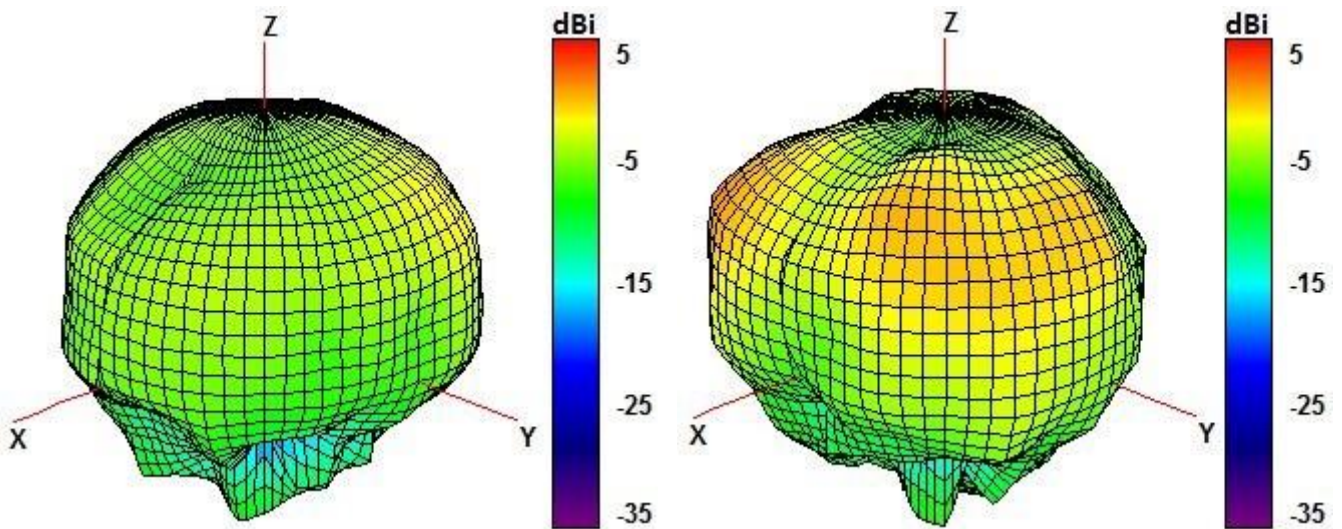


1750 and 1850 MHz Radiation pattern

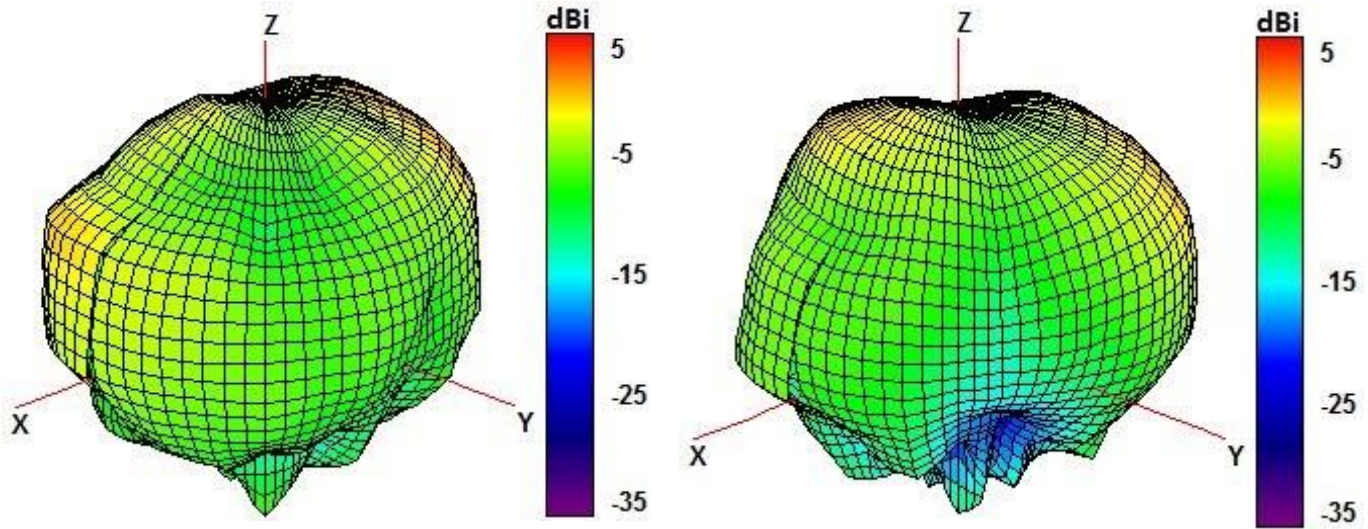


1950 and 2100 MHz Radiation pattern

Cable 2: 2.4 GHz ISM

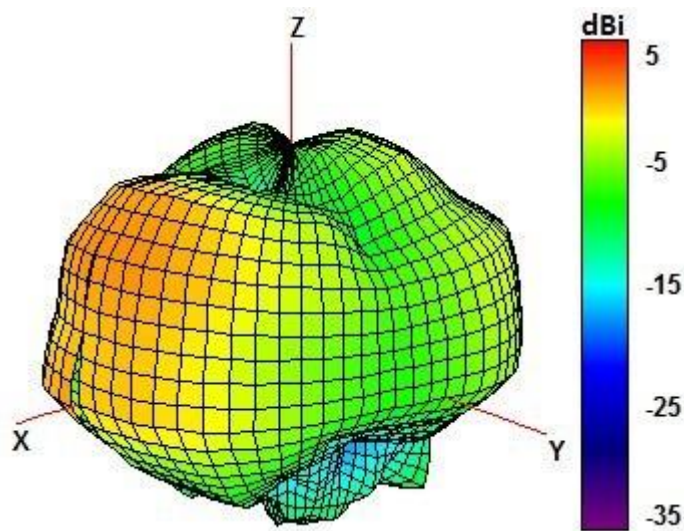

2450 MHz Radiation pattern

4. Antenna drawings

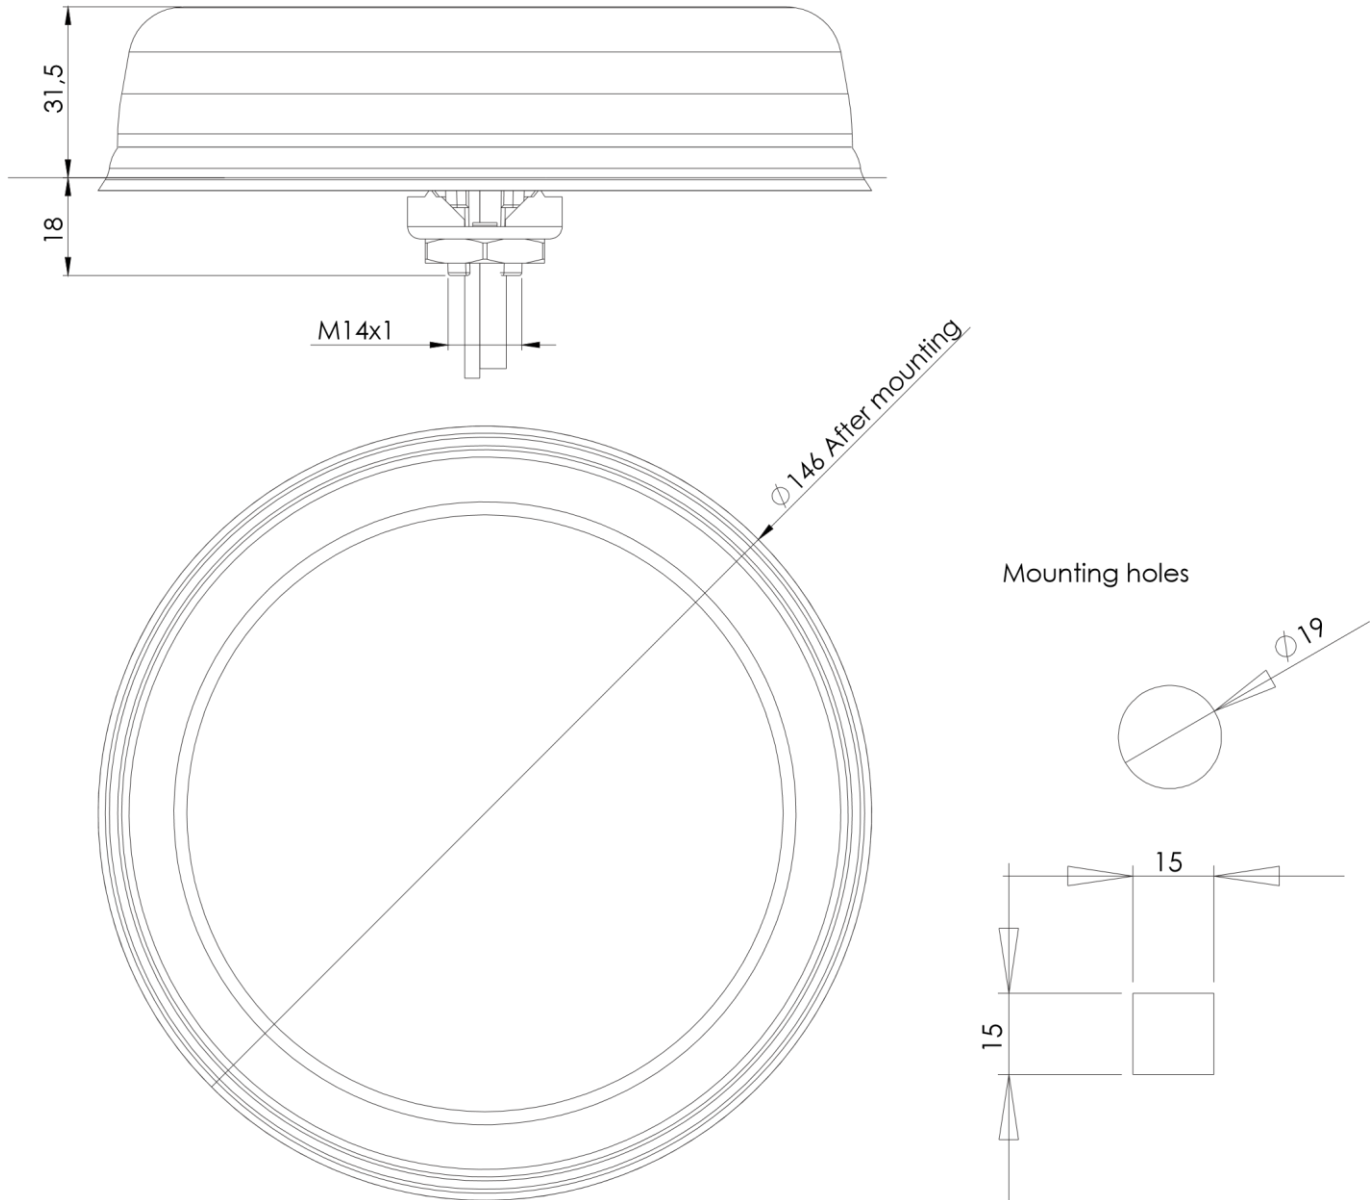

5. Antenna Image

