

SECURE+

Carbon monoxide detector

Discover product in details



Nexelec



Design

Facilitates acceptance of the detector by residents



Digital detector logbook

QR Code + application for monitoring installation and maintenance of a fleet of detectors



Electronic maintenance certificate

After each maintenance operation, a unique certificate is recorded in the detector's secure NFC chip

Universally compatible mounting base ⁽¹⁾

Simplifies replacement of other brands of detectors without drilling new mounting holes

CO pre-alarm

Before the audible alarm is triggered, a red light flashes if abnormal abnormal CO levels are detected

Factory-calibrated CO sensor

To ensure reliable measurements throughout the detector's entire lifetime

3M adhesive fastener

CE and NF approved for installation without screws or plugs. No need to drill hazardous substrates (asbestos)

10-years battery ⁽²⁾

Sealed and welded lithium battery

Test / Silence button


Large, easy-to-reach touch button on front panel

Silence function

Stops the alarm and/or puts the detector in standby mode 5 minutes without removing from base

Compact mounting base

Only 3 cm in diameter to avoid damaging the installation surface

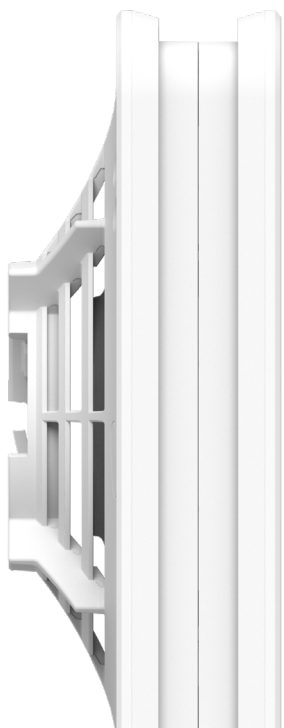

SECURE+

Carbon monoxide detector

Nexelec

www.nexelec.eu



105 mm

35 mm

105 mm

Net weight: 150 g (including battery and stand)

Reference

X345CM

Battery

10 years

FUNCTIONS



Signal light

Discreet LED indicator in standby mode, powerful in alarm mode



Air 360°

Exclusive detection technology. Simplifies maintenance by residents



Insect barrier

Pest protection grid integrated into the detector



Powerful audible alarm

85 dB at 3 metres to quickly alert occupants



12-hour beep delay

Temporarily silences fault beeps until detector is replaced



Rip-off protection

Lockable mounting base to reduce the risk of detector removal in rental housing

FEATURES

Carbon monoxide

Technology: CO detection by electrochemical sensor
CO: 0 - 1 000 ppm
Resolution: 1 ppm

Terms of use

Indoor environment
Temperature: -10°C to +45°C
Humidity: 10% RH to 95% RH (non-condensing)

Mounting type

Wall, ceiling or free-standing

Set contents

1 detector
1 mounting base
1 adhesive fastener
2 nylon screws and plugs
1 user manual

Certification

EN50291



Warranty ⁽³⁾

5 years

⁽¹⁾ Optional accessory or function available on request ⁽²⁾ The battery is designed for a non-guaranteed life of 10 years; battery life may vary. Please refer to the «Precautions and Limitations» section of the user manual.

⁽³⁾ Please refer to the «Warranty» section of the user manual.