

Product Datasheet

LTE Fiberglasantenne

CELLULAR / LTE Rigid Fiberglass

Key Features

CELLULAR / LTE

- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 MHz


Embedded Antenna

Self-Adhesive

Ground Plane Independent

Dimensions 113 x 8.5 x 0.8 mm

Customizable Cable and Connector

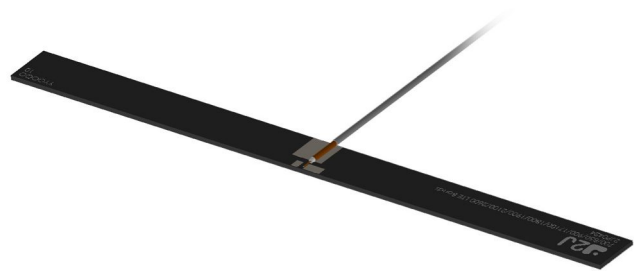

1. Antenna and electrical specifications

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-7.9	~-8.2	~-10.3
VSWR	~3.4:1	~2.6:1	~1.9:1
Efficiency (%)	~56	~66	~78
Peak Gain (dBi)	~1.2	~4.0	~5.6
Average Gain (dB)	~-2.8	~-1.8	~-1.1
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	U.FL Standard (Other Connectors Available)		
Cable Length	100mm Standard (Any Cable Length Available)		
Cable Type	1.37mm Mini-Coax Standard (Other Cables Available)		

Antenna Measurement Conditions:

Mounted on 30 x 30 x 0.25 cm ABS Plate



100 mm of 1.37 mm Mini-Coax Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	
Mounting Type	Self-adhesive
Dimensions (mm)	113 x 8.5 x 0.8
Adhesive Type	3M 467
Material	Rigid Fiberglass
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

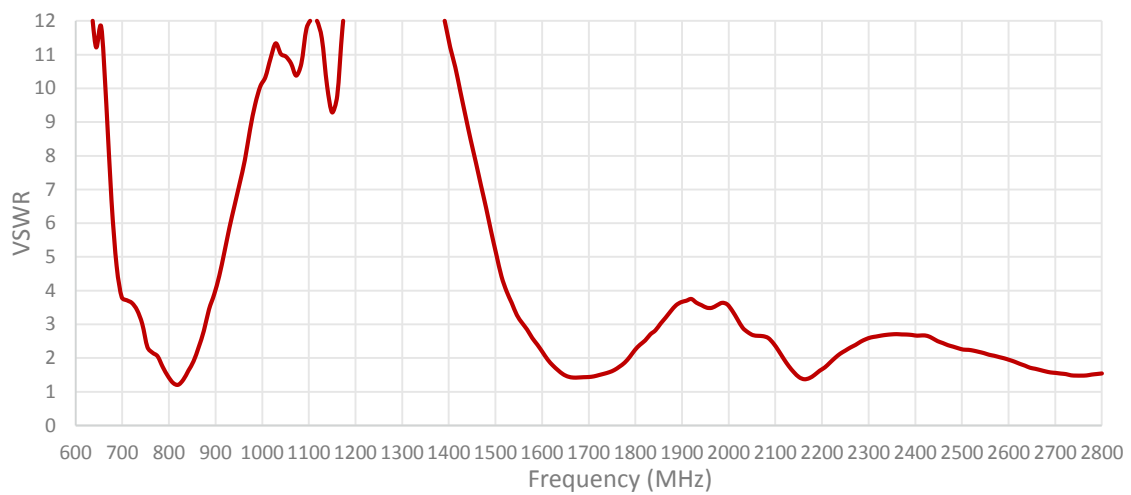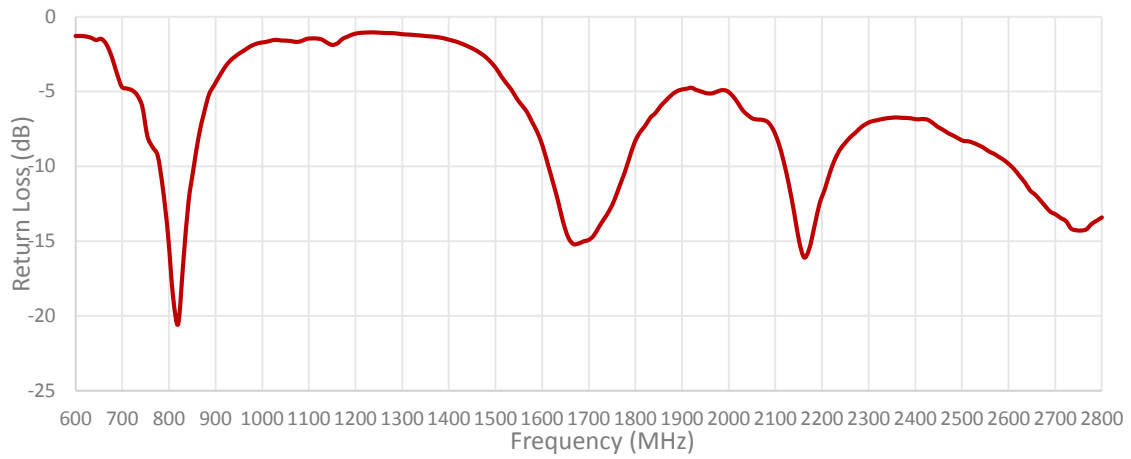

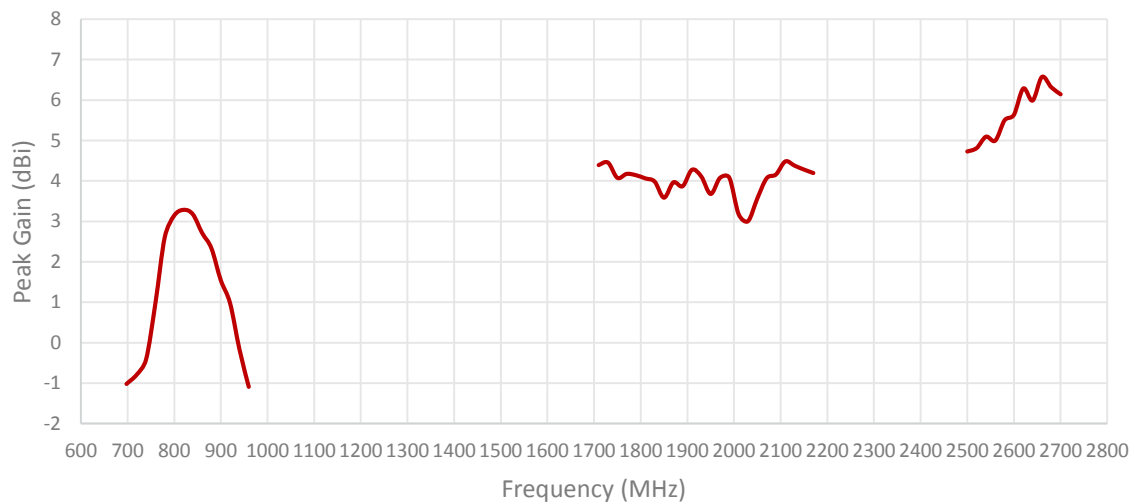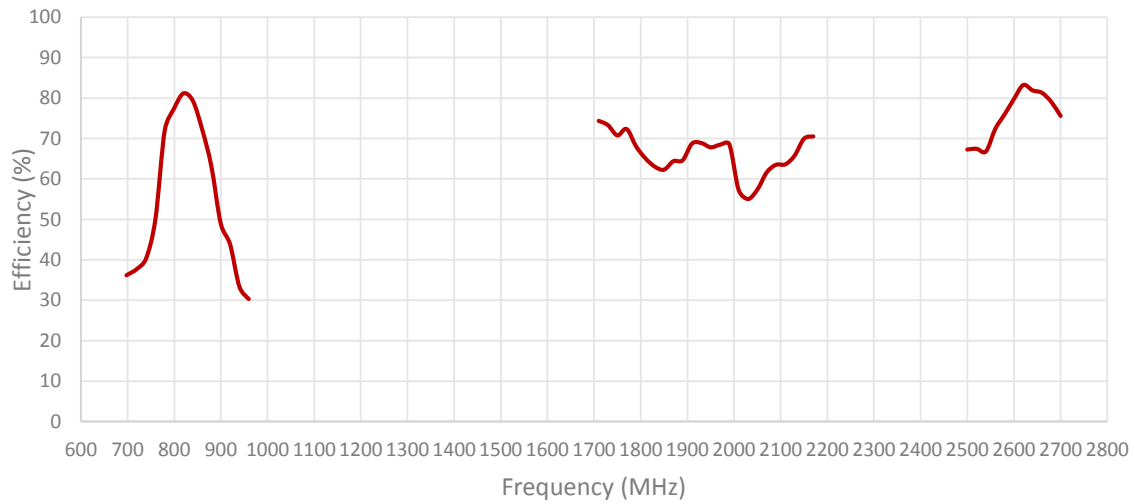


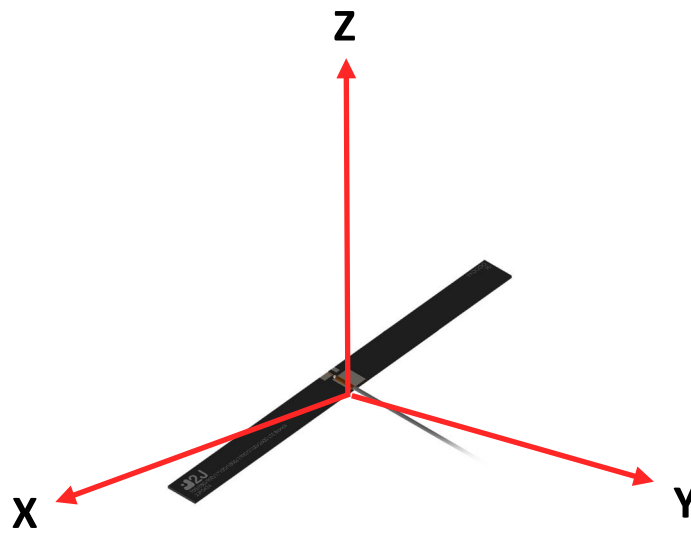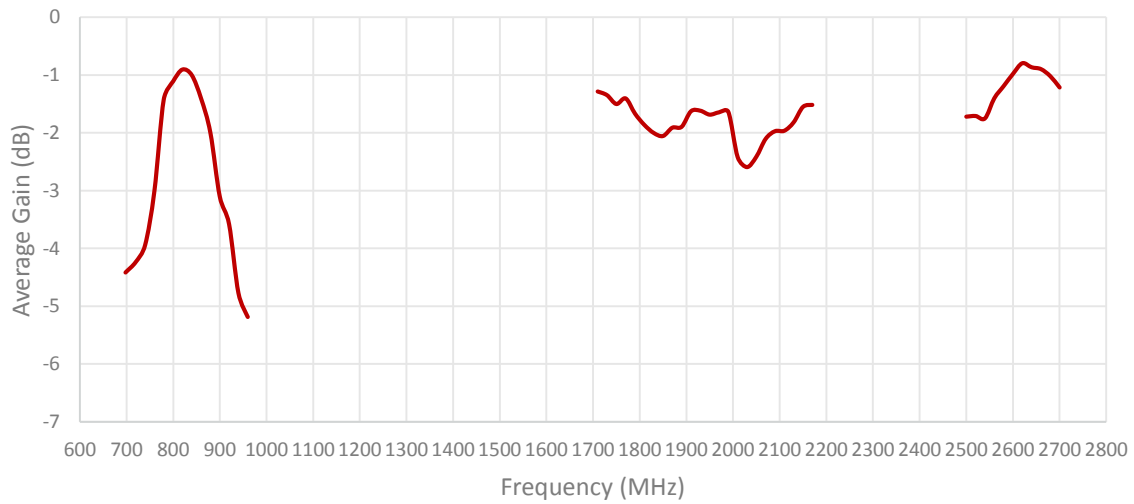


Radiation pattern reference

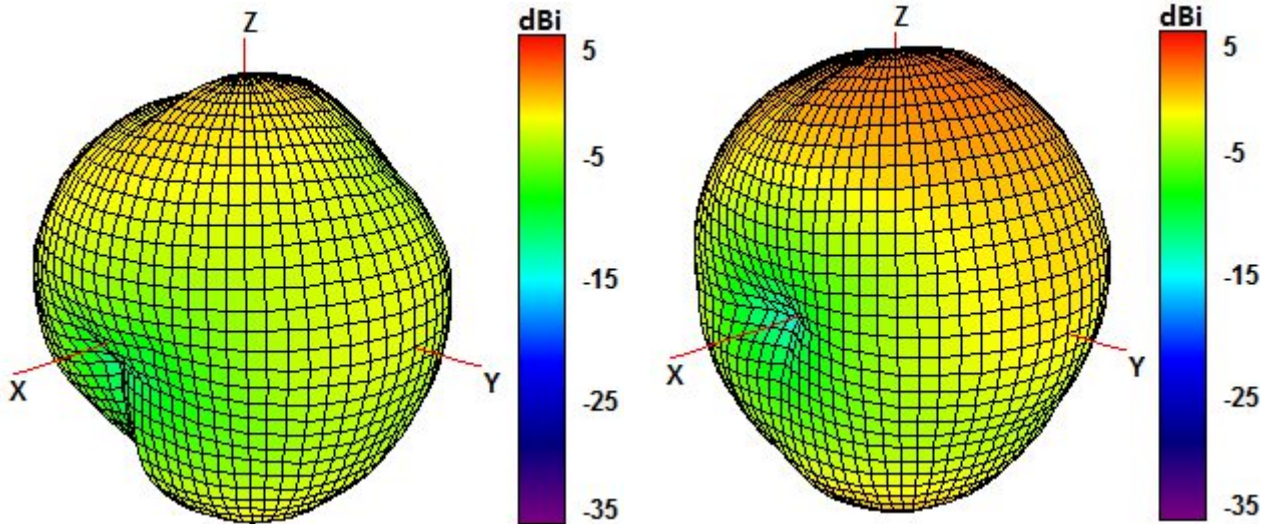


750 and 850 MHz Radiation pattern

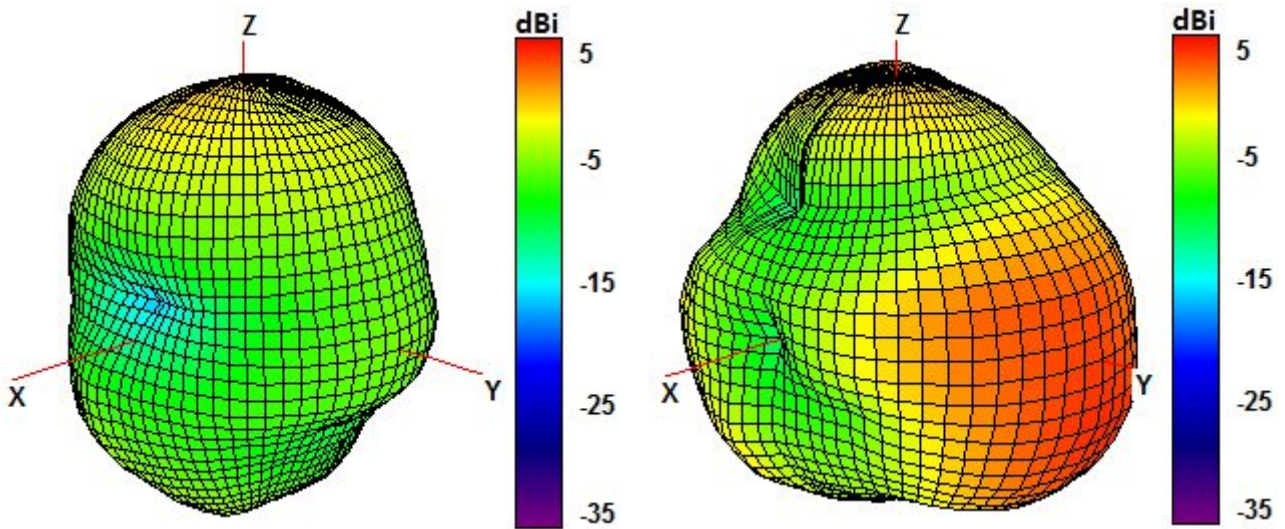

940 and 1750 MHz Radiation pattern

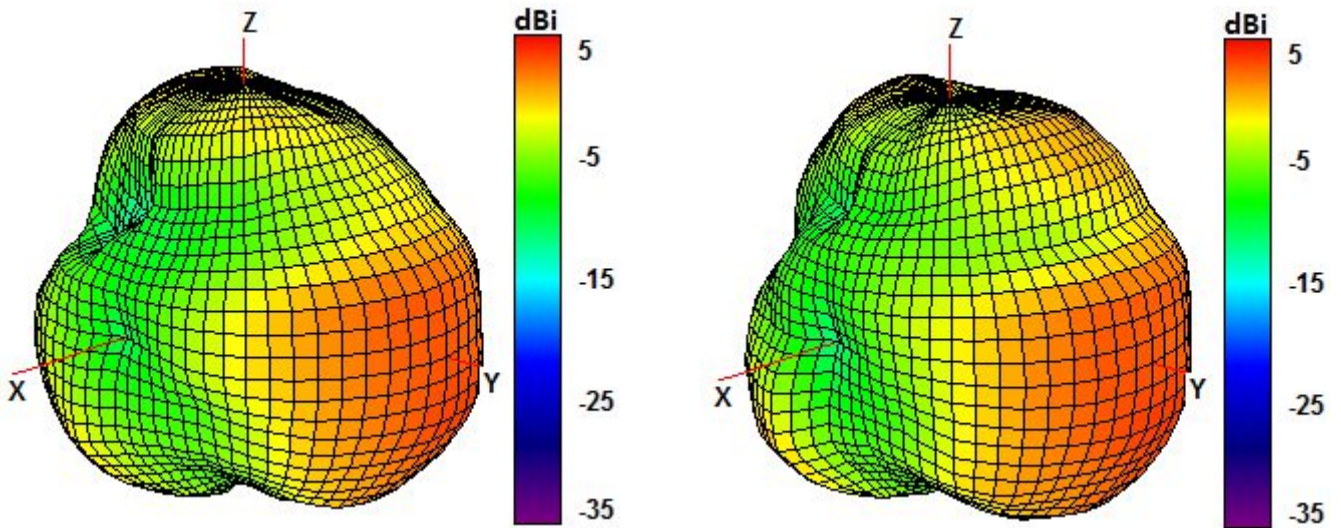


1850 and 1950 MHz Radiation pattern

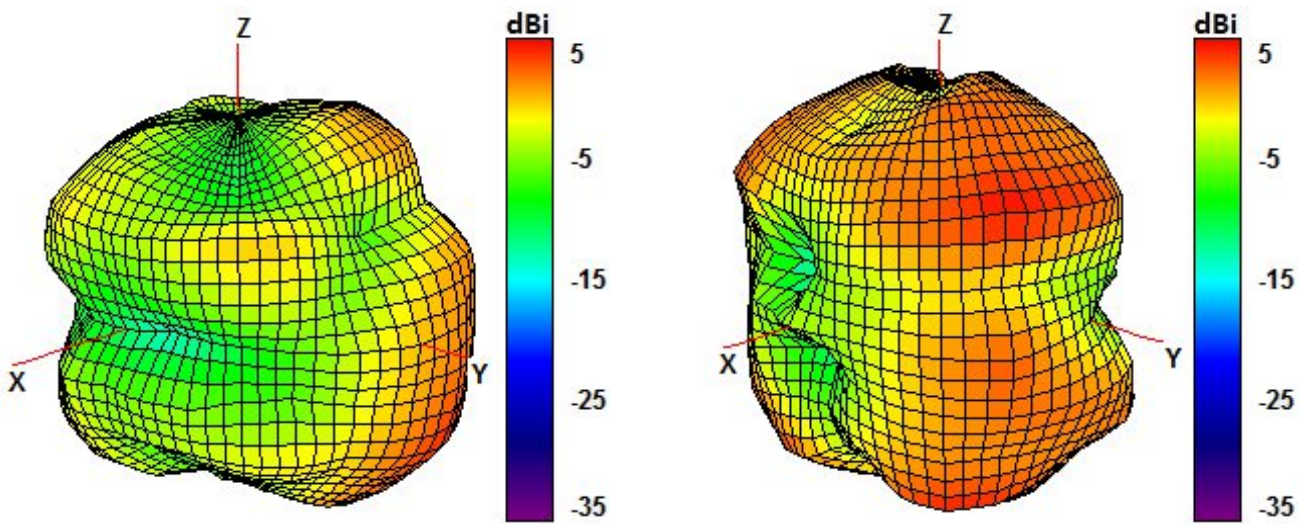

2100 and 2600 MHz Radiation pattern

4. Antenna drawings

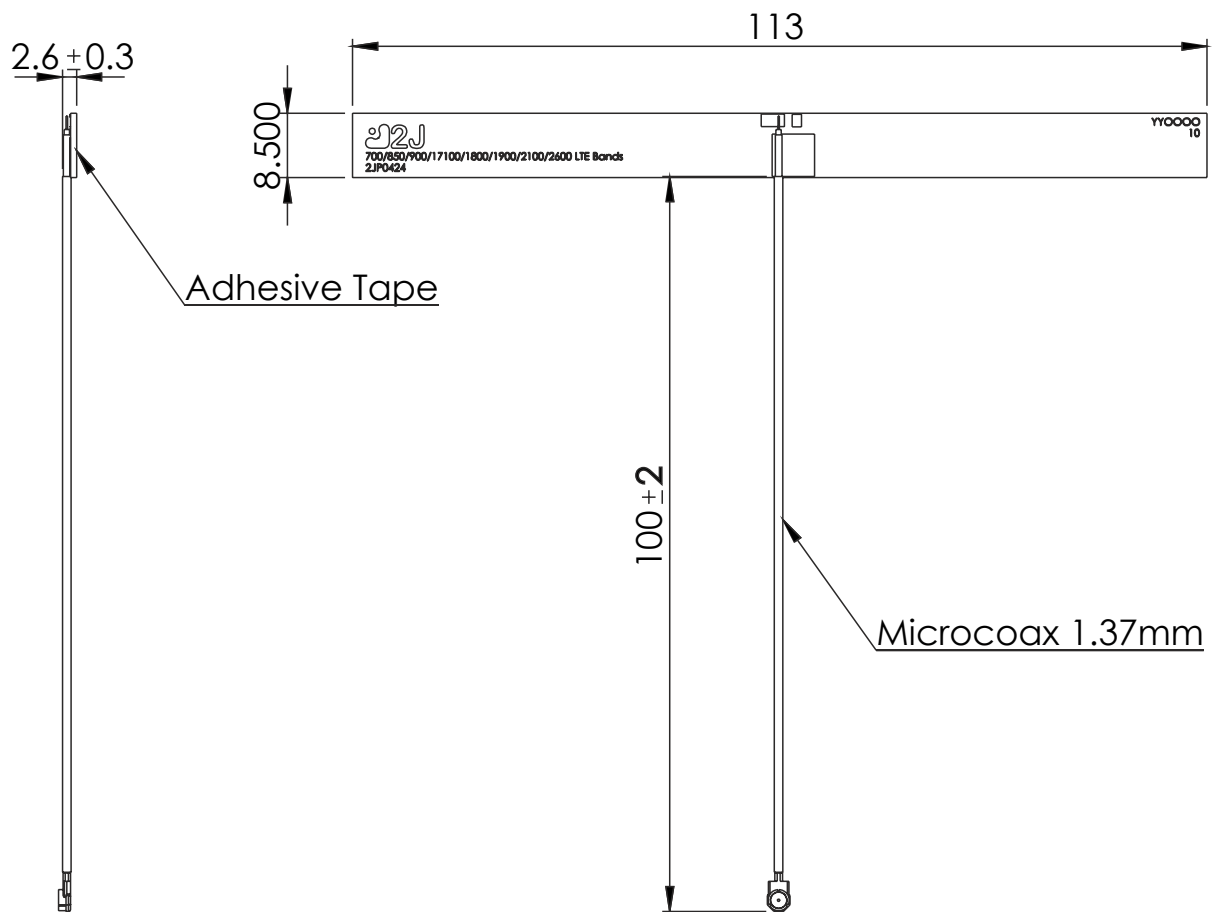

5. Antenna Images

