


Indoor Ambience Monitoring Sensor

Featuring LoRaWAN®

AM319

Milesight

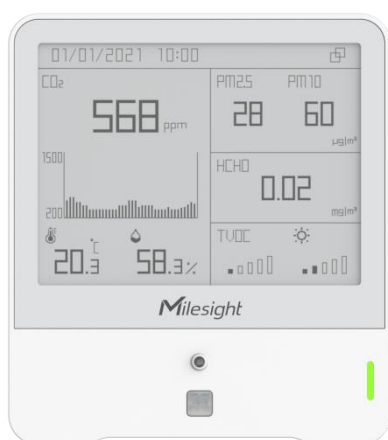

◆ Introduction

AM319 is a compact indoor ambience monitoring sensor for measurement of temperature, humidity, light, CO₂ concentration, HCHO/O₃ level, TVOC, barometric pressure, PM2.5, PM10 and motion. The data will be shown on the E-ink screen in real-time, which helps to measure the indoor environment and comfort.

Sensor data is transmitted using LoRaWAN® technology. Combining Milesight LoRaWAN® gateway and Milesight Development Platform solution, users can manage all sensor data remotely.

AM319 can be used in offices, stores, classrooms, hospitals, etc.

◆ Features

- Integrated with multiple sensors like humidity, temperature, CO₂, light, barometric pressure, PM2.5, PM10, etc.
- Multiple display modes and clear emoticon to easily understand the comfort levels via screen
- Support DC power supply
- Equipped with traffic light indicator and buzzer to indicate device status and threshold alarms
- Store locally historical records and support retransmission to prevent data loss
- Compliant with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud and Milesight Development Platform

◆ Specifications

Wireless Transmission

Technology	LoRaWAN®
Antenna	Internal Antennas
Frequency	CN470/RU864/IN865/EU868/US915/AU915/KR920/AS923-1&2&3&4
Tx Power	16dBm(868MHz)/22dBm(915MHz)/19dBm(470MHz)
Sensitivity	-137dBm @300bps
Work Mode	OTAA/ABP Class C

Sensors

Temperature

Operating Principle	Digital CMOSens® technology (MEMS)
Range	-20°C~60°C
Accuracy	± 0.2°C
Resolution	0.1°C

Humidity

Operating Principle	Digital CMOSens® technology (MEMS)
Range	0% ~ 100% RH
Accuracy	± 2% RH
Resolution	0.5% RH

Motion

Operating Principle	Passive infrared (PIR)
Detection Range	80 ° Horizontal, 55 ° Vertical, Maximum 5m
Status	Vacant/Occupied

Light

Operating Principle	Photodiode
Range	0-60000 Lux (Determine as 6 levels, 0-5)

TVOC

Operating Principle	MOX (MEMS)
Report Mode ¹	IAQ Rating or Concentration Value
IAQ Rating	Range: 1.00 - 5.00
	Accuracy: ±1
	Resolution: 0.01
Concentration	Range: 0 - 2000 µg/m ³

	Accuracy: 20 $\mu\text{g}/\text{m}^3 \pm 15\%$ of readings (1 - 500 $\mu\text{g}/\text{m}^3$) Resolution: 1 $\mu\text{g}/\text{m}^3$
Barometric Pressure	
Operating Principle	Piezoresistive absolute pressure sensor (MEMS)
Range	260 - 1260 hPa
Accuracy	± 0.5 hPa
Resolution	0.1 hPa
Carbon Dioxide (CO₂)	
Operating Principle	Photoacoustic
Range	400 ~ 2000 ppm
Accuracy	$\pm (50 \text{ ppm} + 5 \% \text{ of reading}) (-10^\circ\text{C} \sim 60^\circ\text{C})$
Resolution	1 ppm
PM2.5 & PM10	
Operating Principle	Laser Scattering
Range	0 ~ 1000 $\mu\text{g}/\text{m}^3$
Accuracy	0~100($\pm 10 \mu\text{g}/\text{m}^3$), 100~1000($\pm 10 \%$) (-10°C~ 60°C)
Resolution	1 $\mu\text{g}/\text{m}^3$
Formaldehyde (HCHO)²	
Operating Principle	Electrochemical
Range ³	0 ~ 1.25 mg/m^3
Accuracy	$\pm 10 \%$
Resolution	0.01 mg/m^3
Working Life	6 Years
Ozone (O₃)²	
Operating Principle	Electrochemical
Range	0 ~ 10 ppm
Accuracy	$\pm 5 \%$ FS
Resolution	0.01 ppm
Working Life	2 Years
Other Interfaces	
Display	4.2-inch Black & White E-Ink Screen
Button	1 × Power Button + 1 × Reset Button
LED & Buzzer	1 × Traffic Light Status & Alarm Indicator + 1 × Buzzer
USB	1 × Type-C Port for Power Supply, Configuration or Console
Software	

Power On/Off	1. Mobile App via NFC 2. PC software via NFC or USB Type-C port 3. Power Button
Configuration	1. Mobile App via NFC 2. PC software via NFC or USB Type-C port 3. Downlink
Advanced Features	Calibration, Threshold Alarm, Data Storage (18,000 entries), Data Retrievability, Data Retransmission, Smart Screen Mode, Button Lock

Physical Characteristics

Power Supply	5V/1A by Type-C Port
Operating Temperature	-20°C - 60°C (E-Ink Screen: 0°C - 40°C)
Relative Humidity	10% - 90% (non-condensing)
Ingress Protection	IP30
Housing & Color	ABS (UL94 HB), White
Weight	148g
Dimension	100.8 × 114 × 22 mm (3.97 × 4.49 × 0.87 in)
Installation	Wall Mounting via 3M Tape or Screws

Approvals

Regulatory	CE, FCC, ISED
Environmental	RoHS

Note:

- Reference to IAQ rating guideline (conversion from mg/m³ to ppm by the factor is about 0.5):

IAQ Rating	TVOC (mg/m ³)	Air Quality
≤1.99	<0.3	Very Good
2.00 to 2.99	0.3 to 1.0	Good
3.00 to 3.99	1.0 to 3.0	Medium (not recommended for exposure > 12 months)
4.00 to 4.99	3.0 to 10.0	Poor (not recommended for exposure > 1 months)
≥5.00	>10.0	Bad (not recommended)

- HCHO or O₃ sensor is alternative option and both support replacement.
- For HCHO at 760 mmHg and 20°C, 1 ppm = 1.25 mg/m³.


◆ Ordering Information

Model	PN	Description
AM319	HCHO-IR	Temperature, Humidity, Light, Motion, CO ₂ , TVOC, Pressure, PM2.5, PM10, HCHO

O₃

Temperature, Humidity, Light, Motion, CO₂, TVOC, Pressure, PM2.5, PM10,
O₃

◆ PIR Area

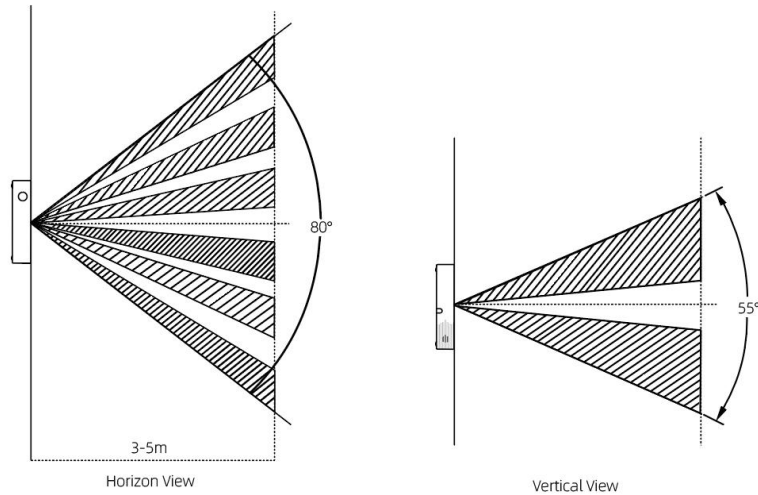

◆ Dimensions (mm)

